


APPLICATION			REVISIONS				
NEXT ASSY	USED ON	VAR	REV	DESCRIPTION	ECN	DATE	APP'D
			NR	RELEASED TO DRAFTING		8/30/04	DMH/vr

27348

PCB Piezotronics Inc. claims proprietary rights in the information disclosed herein. Neither it nor any reproduction thereof will be disclosed to others without written consent of PCB Piezotronics Inc.

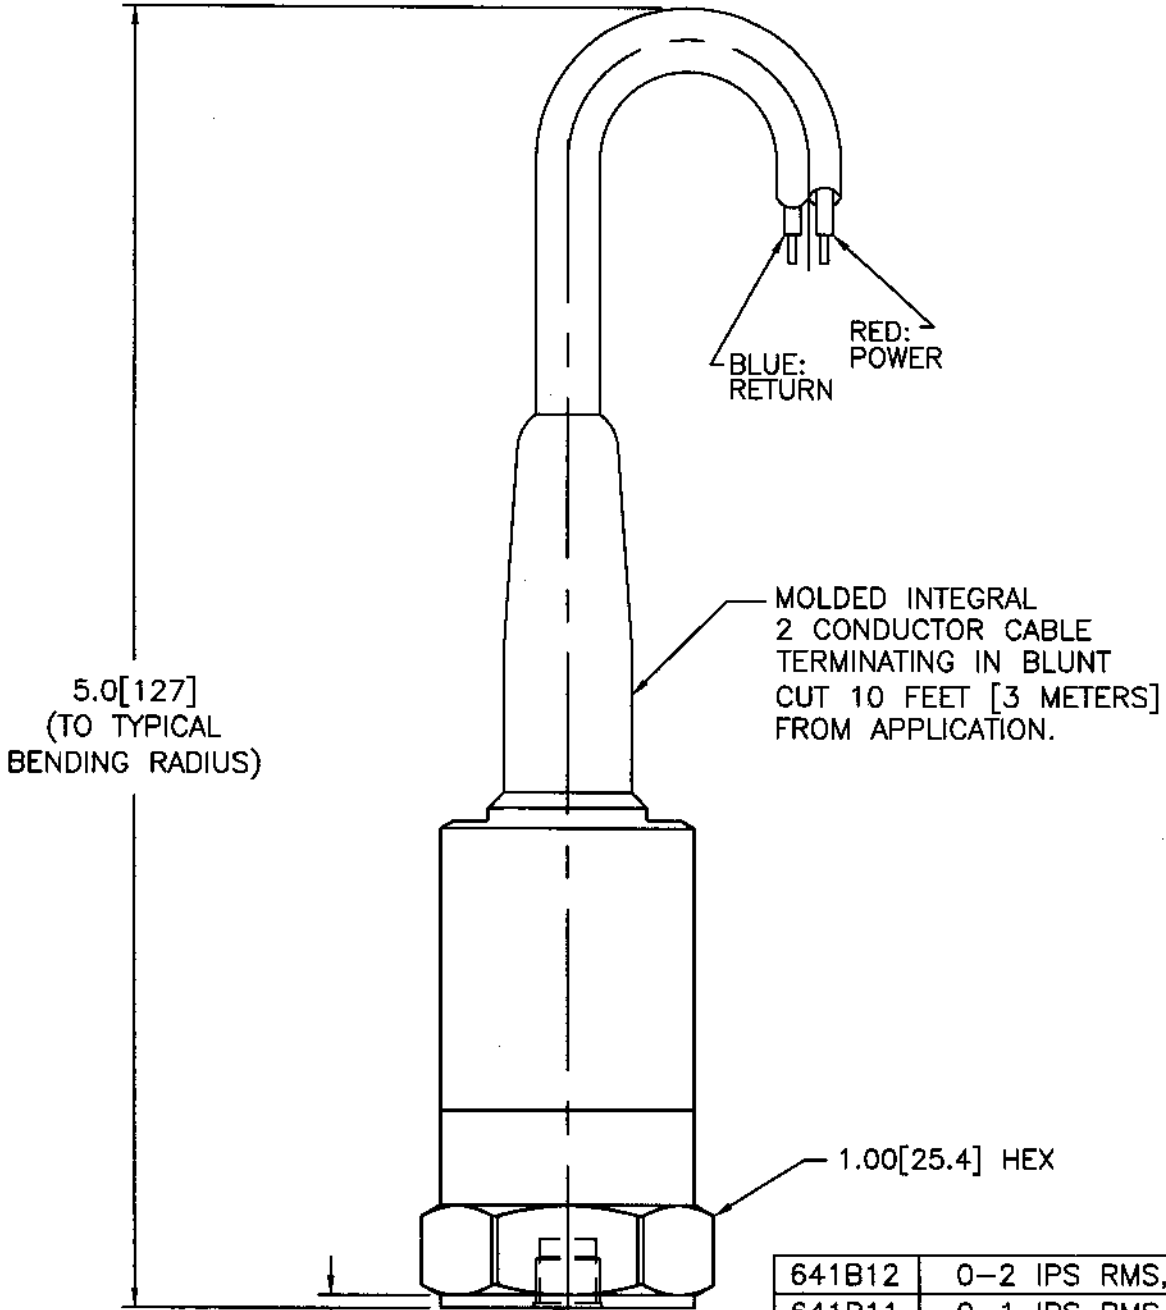

5.0[127]  
(TO TYPICAL  
BENDING RADIUS)

RED: POWER  
BLUE: RETURN

MOLDED INTEGRAL  
2 CONDUCTOR CABLE  
TERMINATING IN BLUNT  
CUT 10 FEET [3 METERS]  
FROM APPLICATION.

1.00[25.4] HEX

.050[1.27]  
1/4-28 UNF-2B  
X .20[5.1] ▽  
Ø.990[Ø25.2]  
TYP

641B12	0-2 IPS RMS, 10Hz-1kHz
641B11	0-1 IPS RMS, 10Hz-1kHz
641B10	0-0.5 IPS RMS, 10Hz-1kHz
640B12	0-2 IPS PK, 3Hz-1kHz
640B11	0-1 IPS PK, 3Hz-1kHz
640B10	0-0.5 IPS PK, 3Hz-1kHz
MODEL	DESCRIPTION

UNLESS SPECIFIED TOLERANCES		DRAWN	PCE	8/30/04	MFG	BD	9/2/04	 3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 EMAIL: SALES@PCB.COM
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]	CHK'D	DM	9/1/04	ENGR	MJE	9/1/04	
DECIMALS XX ±.03 XXX ±.010	DECIMALS X ±0.8 XX ±0.25	APP'D	UA	9/13/04	SALES	DM	9/2/04	
ANGLES ±2 DEGREES	ANGLES ±2 DEGREES	TITLE		DRAWING OUTLINE		CODE IDENT. NO.	DWG. NO.	
FILLETS AND RADII .003 - .005	FILLETS AND RADII [0.07 - 0.13]	MODEL 640B1X, M, 641B1X, M				52681		27348
DD011 REV. C 01/21/03		4-20 mA VELOCITY TRANSMITTER				SCALE: 1.33X		SHEET 1 OF 1