

Portable [condition monitoring]

# OilCMS

[ON-SITE PORTABLE SERIES]

**OilCMS is the portable, robust, real-time solution featuring Atten[2] optical technology for particle counting and particle morphology analysis in lubrication systems.**

The Portable OilCMS utilizes breakthrough digital imaging technology which provides a greater insight into the size and type of particulate in any oil system. Air bubble elimination and shape recognition gives root cause particle analysis. A stepper motor pump for high viscosity oils completes the package.

Giving ISO 4406 counts as well as 4, 6, 14, 21, 38 & >70 micron sizing and bubble elimination. Digital imaging combined with advanced algorithms sorts particles into fatigue wear, cutting wear and sliding wear categories to give root cause analysis.



## All Atten[2] technology functionalities available


- Particle counting according to ISO 4406 standard > 4 microns
- Discrimination and counting of air bubbles
- Classifies particles in 6 ranges (>4, >6, >14, >21, >38, >70  $\mu\text{m}$ )
- Shape analysis

[FEATURES]



**Digital Imaging Particulate Counter**

Classification and counting of particles larger than 4 microns in 6 ranges. 4, 6, 14, 21, 38, 70 >100 microns. Air bubble and water droplet elimination.



**Root cause information**

Shape determination to classify fatigue, sliding or cutting wear as well as fibre identification helping to identify the root cause.


[TECHNICAL INFORMATION]

<b>Fluid Compatibility</b>	Synthetic oils, organic oils, mineral oils & diesel fuel (2,400 cSt viscosity limit)
<b>Display Information</b>	<b>Particulate:</b> ISO 4406, SAE AS4059 & NAS 1638, bubble elimination and particle wear analysis
<b>Modes of operation</b>	High-pressure live system sampling (up to 350 bar) - via a high-pressure adaptor Bottle sampling and tank sampling (up to 2,5 bar)
<b>Data</b>	All data stored locally and backed up off-site. Export to .cSV or PDF

[DIMENSIONS]



## [TOUCH SCREEN DISPLAY]

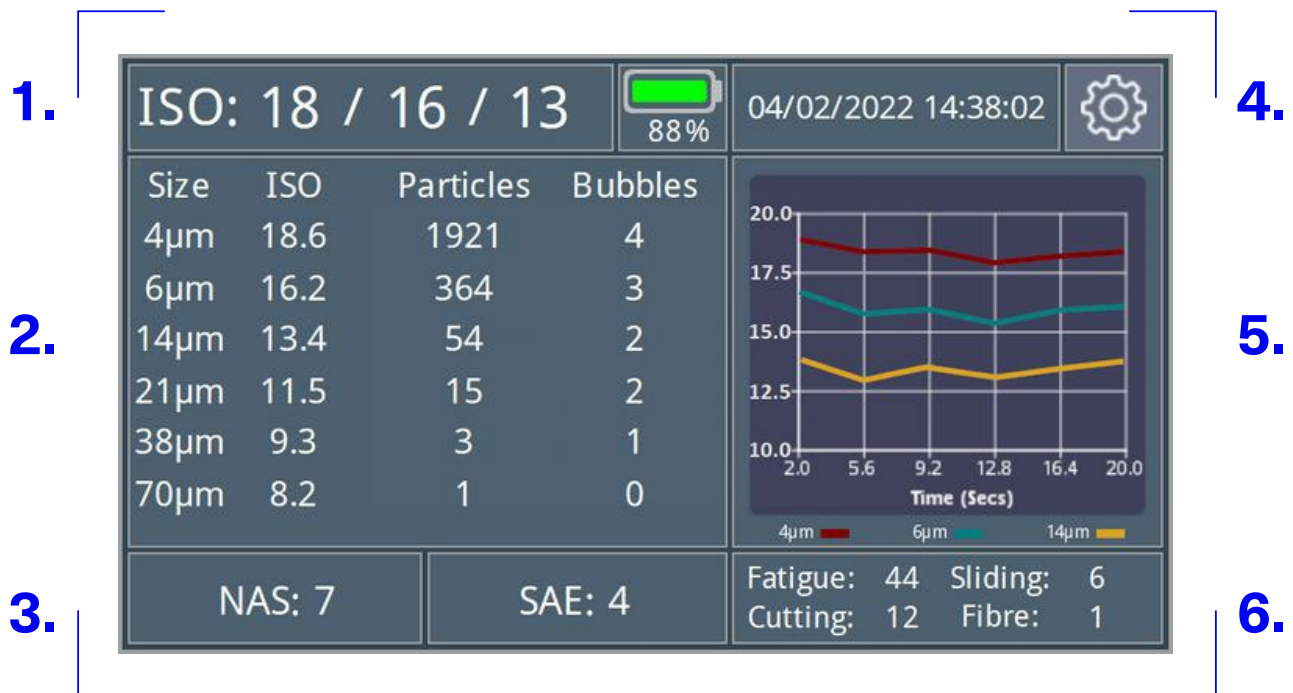

- 1.** Clear and easy to read ISO code which changes between green, white and red to indicate the oil cleanliness
- 2.** Oil cleanliness for each size category details the ISO code, number of particles per millilitre and the bubbles detected
- 3.** Additional sensors give an unprecedented insight into the overall condition of the oil
- 4.** Additional settings allow control of the pump speed for priming and flushing, datalogging, ISO cleanliness alarm limits and changing the time zone
- 5.** Oil cleanliness is trended over time to show how its condition changes
- 6.** Particles are analysed and sorted into fatigue wear, cutting wear, sliding wear and fibre identification to give root cause analysis



### Internal Stepper Motor Pump

We've developed a fully controllable stepper motor driven pump to deliver exact flow rates for any oil from 1 to 2,400 cSt. The pump also allows connection to a live system up to 350 bar via a high pressure adaptor.



### Battery life

Internal rechargeable lithium battery provides a long life for remote use.